


Voyager Sigma

96233813 VOYAGER SIGMA LED E3M WHI

THORN

incl. LED	1W LED	IP40			650°C	T _a 5 35
-----------	--------	------	---	---	-------	------------------------

Versatile exit sign with low-maintenance LED option

A self-contained, maintained emergency exit sign for 1 x 1W LED strip giving 3 hours manual test emergency operation. IP40, Class I electrical. Body in polycarbonate, finished white. Diffuser in polycarbonate. Can be wall mounted with 20mm conduit or rear back box entry. Legend panels required to be ordered separately in either ISO or EU formats. Complete with LED strip


Dimensions: 327 x 65 x 197 mm

Total power: 4 W

Weight: 1.4 kg



TLG_VSIG_F_P2.jpg

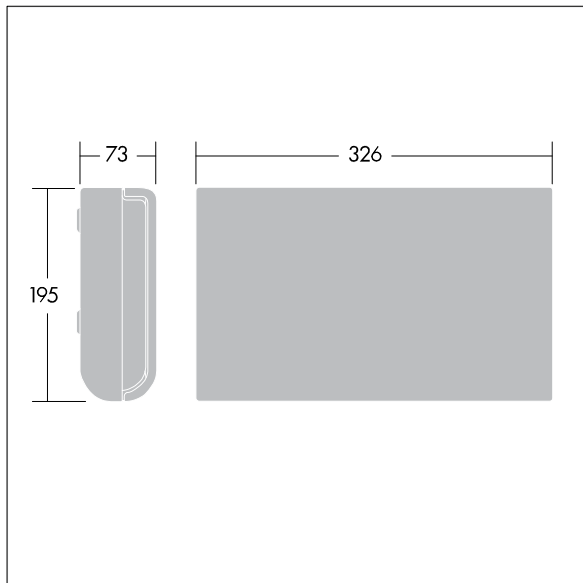

TLG_VYSG_M_LD1.wmf

Lamp position: STD - standard

Light Source: LED

Luminaire luminous flux*: 45 lm

Luminaire efficacy*: 11 lm/W

Lamp efficacy: 11 lm/W

Correlated colour temperature*: 5500 Kelvin

Ballast: 1x LED_Con Tridonic EM powerLED Basic

Luminaire input power*: 4 W Lambda = 0.95

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting